




DL / DE Cartridge Filter

Liquid flow rate per 10" filter cartridge

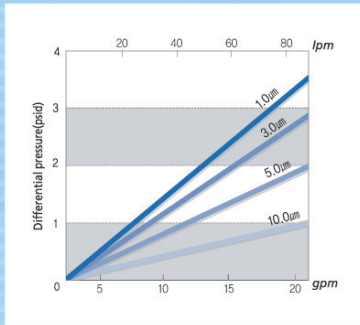

Description

- CSM economical & longer life cycle depth filter cartridges are constructed of pure polypropylene fiber.
- To produce filter with melt-blown process.
- Non-fiber releasing, suitable in relative high temperature.
- Materials are FDA listed as acceptable for potable and edible.
- Available in a wide selection of micron ratings from 1µm to 100µm.

Application

- DI-water, chemical, food & beverage, coating, cosmetic

Specification

Material of Construction

- Media : polypropylene microfiber 100%
- Structure : coreless cartridge

Recommended Operating Conditions

- Maximum differential pressure : 43.5psi(3.0 bar) at 25°C
- Maximum temperature : 80°C

Removal Ratings(µm)

- 1, 3, 5, 100

Cartridge Dimensions

- In diameter : 28 / 30mm
- Out diameter : 64mm
- Length(mm) : 250, 500, 750, 1000



Ordering Information

1	2	3 4	5	6 7	8	9
Grade	Type	Media	Support Material	Micron Rating	End-cap Option	Length
E: Electronics	D : Depth	L : Long life E : Economy	P : Polypropylene	00 : 0.5µm 01 : 1.0µm 03 : 3.0µm 05 : 5.0µm 10 : 10.0µm 25 : 25.0µm 50 : 50µm 75 : 75.0µm 11 : 100.0µm	A : 250mm D / O	1 : 10" 2 : 20" 3 : 30" 4 : 40"