




DJ Cartridge Filter

Liquid flow rate per 10" filter cartridge

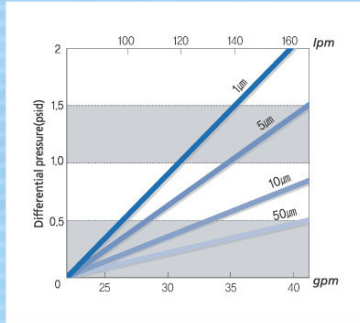

Description

- CSM jumbo depth filter cartridges is constructed of polypropylene filter media.
- Thermal bonded micro-fiber construction offers no fiber release and consistent flow rates as well as superior filtration performance.
- High dirt holding capacity and excellent flow rates.
- Materials are FDA listed as acceptable for potable and edible.
- Available in a wide selection of micron ratings from 0.5µm to 100µm

Application

- DI-water, chemical, R/O pre-filter

Specification

Material of Construction

- Media : polypropylene microfiber 100%
- Core : polypropylene

Recommended Operating Conditions

- Maximum differential pressure : 70psi(4.8 bar) at 25°C
- Maximum temperature : 80°C

Removal Ratings(µm)

- 1, 3, 5, 100

Cartridge Dimensions

- In diameter : 113mm
- Out diameter : 150mm
- Length(mm) : 250, 500, 750, 1000



Ordering Information

1	2	3 4	5	6 7	8	9
Grade	Type	Media	Support Material	Micron Rating	End-cap Option	Length
J : Jumbo	D : Depth	PO : High performance	P : Polypropylene	01 : 1.0µm 05 : 5.0µm 10 : 10µm 25 : 25.0µm 50 : 50µm 75 : 75.0µm 11 : 100.0µm	A : 250mm D / O B : 254mm D / O	1 : 10" 2 : 20" 3 : 30" 4 : 40"